



Our most aggressive drive axle tire designed for commercial vehicles operating in extreme conditions where maximum traction is the priority in on/off road applications.


Line Haul	Regional	Urban	On/Off Road				
Recommen							





www.michelintruck.com

Our most aggressive drive axle tire designed for commercial vehicles operating in extreme conditions where maximum traction is the priority in on/off road applications.

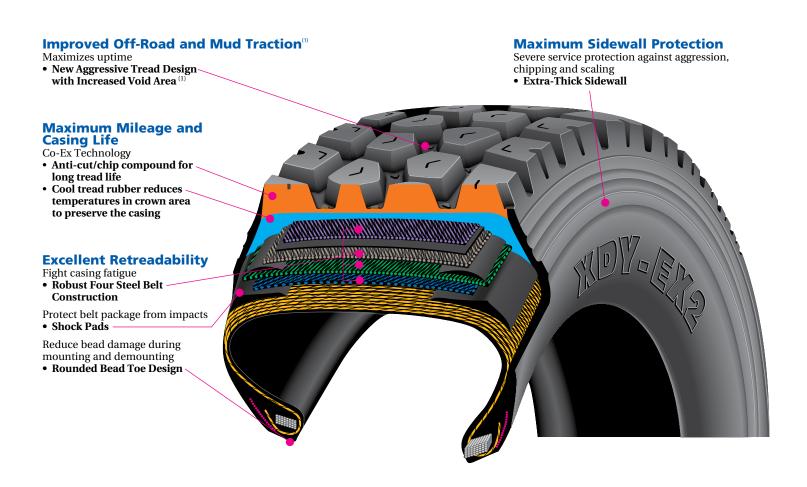

Size	Load Range	Catalog Number	Tread Depth	Max. Speed (*)	Loaded Radius		Overall Diameter		Overall Width (‡)		Approved Wheels (Measuring	Min. Dual Spacing (‡)		Revs Per	Max. Load and Pressure Single			Max. Load and Pressure Dual				
	nange	Number	32nds	mph	in.	mm	in.	mm	in.	mm	wheel listed first.)	in	mm	Mile	lbs.	psi	kg.	kPa	lbs.	psi	kg.	kPa
11R24.5	н	23274	32	65	20.7	527	44.3	1125	11.3	287	8.25, 7.50	12.5	318	467	7160	120	3250	830	6610	120	3000	830

Note: Wheel listed first is the measuring wheel.

(1) When compared to the MICHELIN<sup>®</sup> XDY-EX<sup>™</sup> tire.

(\*) Exceeding the lawful speed limit is neither recommended nor endorsed.

(‡) Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in wheel width. Minimum dual spacing should be adjusted accordingly.

MICHELIN® tires and tubes are subject to a continuous development program. Michelin North America, Inc. reserves the right to change product specifications at any time without notice or obligations. Please consult wheel manufacturer's load and inflation limits. Never exceed wheel manufacturer's limits without permission of component manufacturer.

MICHELIN<sup>®</sup> tires and tubes are subject to a continuous development program. Michelin North America, Inc. reserves the right to change product specifications at any time without notice or obligations. MNA, Inc. continually updates its product information to reflect any changes in Industry Standards. Printed material may not reflect the current Load and Inflation information. Please visit www.michelintruck.com for the latest product information. The actual load and inflation pressure used must not exceed the wheel manufacturer's maximum conditions. Never exceed a wheel manufacturer's limits without permission from the component manufacturer.









Michelin North America Inc., One Parkway South, Greenville, SC 29615, 1-888-622-2306

Copyright © 2018 Michelin North America, Inc. The Michelin Man is a registered trademark owned by Michelin North America, Inc. All rights reserved. An Equal Opportunity Employer (10/18)