



REGIONAL APPLICATIONS

THE MICHELIN® XPS RIB® TIRE

All-steel, all-wheel-position highway rib light truck tire designed to deliver exceptional mileage and retreadability for commercial/fleet operations.

Line Haul	Regional	Urban	On/Off Road
<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Recommended Acceptable



THE MICHELIN® XPS RIB® TIRE

All-steel, all-wheel-position highway rib light truck tire designed to deliver exceptional mileage and retreadability for commercial/fleet operations.


Optimized rib tread designed to provide even tread wear and long mileage with low noise level.

Low rolling resistance casing and tread built for superior fuel economy.

Third steel belt helps provide puncture resistance for enhanced durability.

Steel casing, reinforced steel bead helps deliver exceptional retreadability.

Sidewall protector helps provide resistance to sidewall damage from most curb scrubbing.

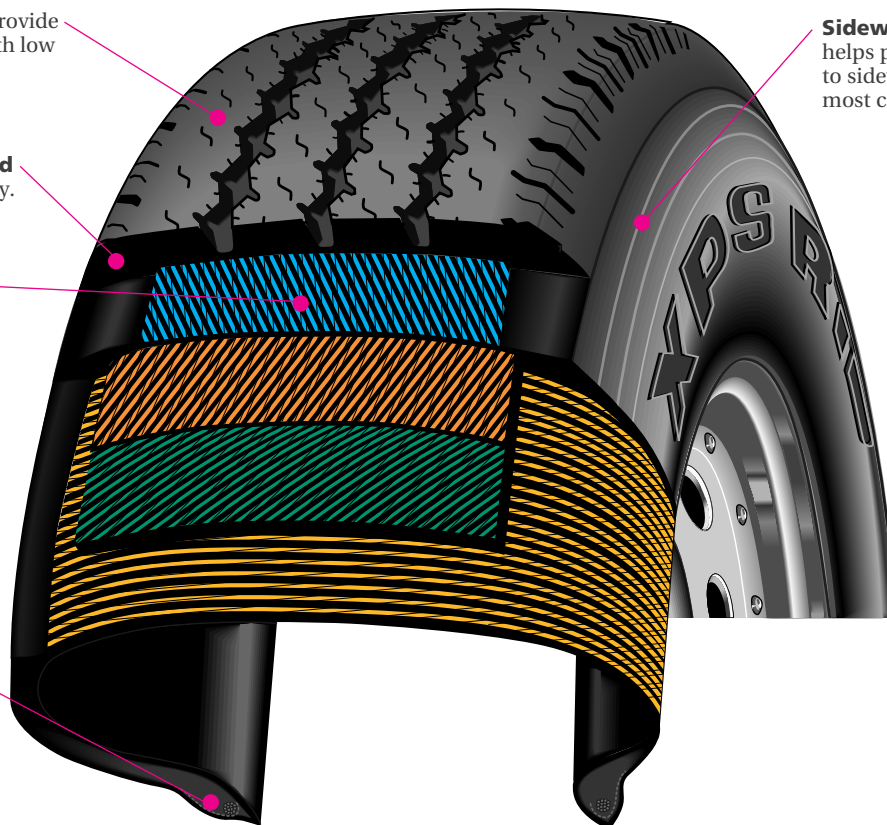

Size ^(1,2)	Load Range	Catalog Number	Tread Depth	Overall Width ⁽³⁾			Load/Speed Rating	Overall Diameter		Wheel Width Range ⁽⁴⁾	Min. Dual Spacing		Revs Per Mile (at 45 mph)	Max. Tire Load Single			Max. Tire Load Dual				
				32nds	in	mm		wheel	in		mm	in		mm	psi	kg.	kPa	lbs.	psi	kg.	kPa
LT215/85R16	E	39510	15	8.9	225	6.0"	115/112/Q	30.5	775	5.5" - 7.0"	9.9	251	687	2680	80	1215	550	2470	80	1120	550
LT225/75R16	E	08404	14	9.0	229	6.0"	115/112/Q	29.4	746	6.0" - 7.0"	10.4	264	706	2680	80	1215	550	2470	80	1120	550
LT235/85R16	E	13080	15	9.7	246	7.0"	120/116/Q	32.2	818	6.0" - 7.0"	10.6	269	655	3042	80	1380	550	2778	80	1260	550
LT245/75R16	E	26848	15	9.6	244	7.0"	120/116/Q	30.6	777	6.5" - 8.0"	11.3	288	676	3042	80	1380	550	2778	80	1260	550

NOTE: All comparisons are between Michelin tires within this category.

(1) Sizes listed do not include P-metric and floatation dimensions. For full range of products refer to "Michelin® Data Book" No. MDL41080.

(2) Exceeding the lawful speed limit is neither recommended nor endorsed.

(3) Tire section widths and overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in wheel width. Minimum dual spacing should be adjusted accordingly.

(4) Range of approved wheel widths. For specific wheel profiles and measuring wheel, refer to "MICHELIN® Truck Tire Data Book" No. MWL40731.


WARNING: Serious or fatal injury may result from tire failure due to underinflation / overinflation / overloading.

To ensure correct pressure and vehicle load, refer to vehicle owner's manual or tire information placard in the vehicle. Serious injury or death may result from explosion of tire/wheel assembly due to improper mounting. Only tire professionals should mount tires, and they should never inflate beyond 40 psi to seat the beads. See Tire Dealer for proper mounting. Before mixing types of tires in any configuration on any vehicle, be sure to check the vehicle owner's manual for recommendations.


MICHELIN® tires and tubes are subject to a continuous development program. Michelin North America, Inc. reserves the right to change product specifications at any time without notice or obligations.


MNA, Inc. continually updates its product information to reflect any changes in Industry Standards. Printed material may not reflect the current Load and Inflation information.

Please visit business.michelinman.com for the latest product information. The actual load and inflation pressure used must not exceed the wheel manufacturer's maximum conditions. Never exceed a wheel manufacturer's limits without permission from the component manufacturer.

 TO FIND OUT MORE
US: business.michelinman.com
CA: business.michelin.ca

 FIND US ON FACEBOOK
[michelintruck](https://www.facebook.com/michelintruck)

 CONTACT US ON THE WEB
US: business.michelinman.com/contact-us
CA: business.michelin.ca/contact-us

 CONTACT US BY TELEPHONE
US: 1-888-622-2306
CA: 1-888-622-2306