



ON / OFF ROAD APPLICATIONS

# **THE MICHELIN® XZY® 3 WIDE BASE TIRE**

Exceptional all-position wide base radial designed for heavy front axle mixed service in on/off road applications.

| Line Haul   | Regional   | Urban | On/Off Road |
|-------------|------------|-------|-------------|
| Recommended | Acceptable |       |             |



(1) Contact your local Michelin representative for details. Michelin reserves the right to modify or discontinue this program at any time for any reason without prior notice.


[business.michelinman.com](http://business.michelinman.com)



**MICHELIN**

# THE MICHELIN® XZY® 3 WIDE BASE TIRE

Exceptional all-position wide base radial designed for heavy front axle mixed service in on/off road applications.

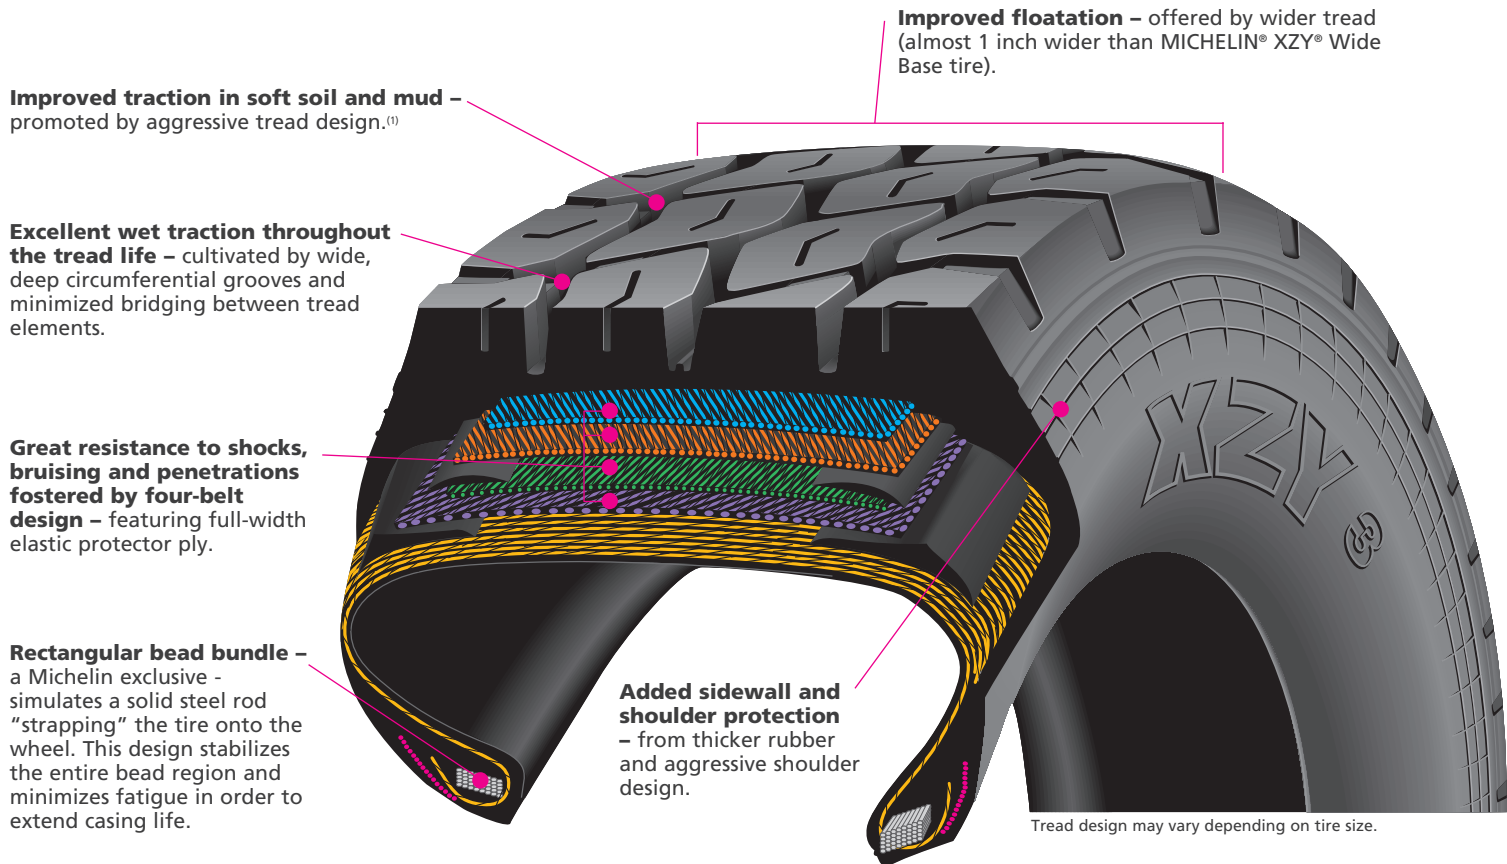

| Size        | Load Range | Catalog Number | Tread Depth | Max. Speed (*) |     | Loaded Radius |     | Overall Diameter |      | Overall Width (‡) |     | Approved Wheels (Measuring wheel listed first.) | Revs Per Mile | Max. Load and Pressure Single |     |      |     |
|-------------|------------|----------------|-------------|----------------|-----|---------------|-----|------------------|------|-------------------|-----|-------------------------------------------------|---------------|-------------------------------|-----|------|-----|
|             |            |                | 32nds       | mph            | kph | in.           | mm  | in.              | mm   | in.               | mm  |                                                 |               | lbs.                          | psi | kg.  | kPa |
| 385/65R22.5 | J          | 53779          | 22          | 65             | 105 | 19.6          | 499 | 42.4             | 1078 | 14.9              | 379 | 11.75, 12.25                                    | 491           | 9370                          | 120 | 4250 | 830 |
| 425/65R22.5 | L          | 40321          | 23          | 65             | 105 | 20.6          | 524 | 44.7             | 1137 | 16.6              | 421 | 13.00, 12.25                                    | 465           | 11400                         | 120 | 5150 | 830 |
| 445/65R22.5 | L          | 83691          | 23          | 65             | 105 | 21.1          | 536 | 45.8             | 1164 | 17.8              | 451 | 14.00, 13.00                                    | 455           | 12800                         | 130 | 5800 | 900 |

Note: Wheel listed first is the measuring wheel.

(1) When compared with MICHELIN® XZY® Wide Base tire.

(\*) Exceeding the lawful speed limit is neither recommended nor endorsed.

(‡) Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in wheel width. Minimum dual spacing should be adjusted accordingly.

MICHELIN® tires and tubes are subject to a continuous development program. Michelin North America, Inc. reserves the right to change product specifications at any time without notice or obligations.

MNA, Inc. continually updates its product information to reflect any changes in Industry Standards. Printed material may not reflect the current Load and Inflation information. Please visit [www.michelintruck.com](http://www.michelintruck.com) for the latest product information. The actual load and inflation pressure used must not exceed the wheel manufacturer's maximum conditions. Never exceed a wheel manufacturer's limits without permission from the component manufacturer.

TO FIND OUT MORE  
US: [business.michelinman.com](http://business.michelinman.com)  
CA: [business.michelin.ca](http://business.michelin.ca)

FIND US ON FACEBOOK  
[michelintruck](https://www.facebook.com/michelintruck)

CONTACT US ON THE WEB  
US: [business.michelinman.com/contact-us](http://business.michelinman.com/contact-us)  
CA: [business.michelin.ca/contact-us](http://business.michelin.ca/contact-us)

CONTACT US BY TELEPHONE  
US: 1-888-622-2306  
CA: 1-888-622-2306